



Data sheet Grease Flow Transmitter HV

Datablad Fettflödesgivare HV






General: The meter is of oval gear type, with built in magnets in one of the oval gear wheels, together with a reed switch which closes twice every revolution. The meter is suitable for continuous measuring of oil, in for example circulating systems, which results in high measured volumes over time. (High Volume)

Dimensions: excl. connector (LxWxH): 55 x 40 x 38
Connection: ISO-G 1/8"
Material: Anodized aluminium, Art.No. 102028
 Stainless steel AISI 316, Art.No. 102030

Weight: Al: 0.194 kg SS: 0.490 kg
Flow range: 0 – 2,500 cm³/min
Temperature: -20 °C - +70 °C
Vibrations: 20 G (10 – 20,000 Hz)
Life: 10⁹ pulses, equal to approx. 655 m³ (reed switch)

Accuracy: Grease NLGI 2: 0.655 cm³/pulse ± 3%
 Oil ISO VG 150: 0.610 cm³/pulse ± 3%


Electrical data:
IP class: IP 67
Connector: 4-pol std. M12x1 male.
 Pin 1: +
 Pin 3: -
 Pin 4: pulse

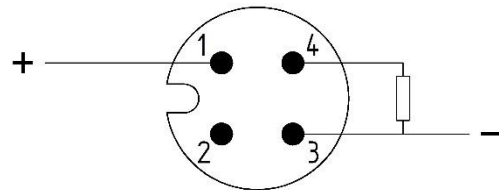

Voltage: 5 – 34 VDC
Power: Current limitation


Accessories:
 Art. No.907133

Elbow contact M12x1, female with built in LED.
 5 m PUR cable.

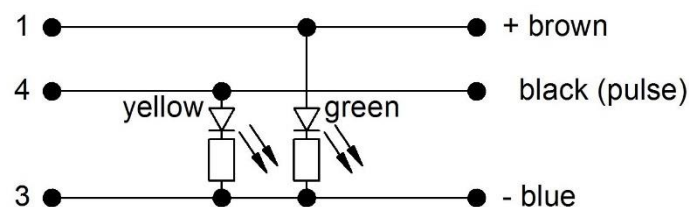

Art. No.907134

Elbow contact M12x1, female.
 5 m. PUR cable.

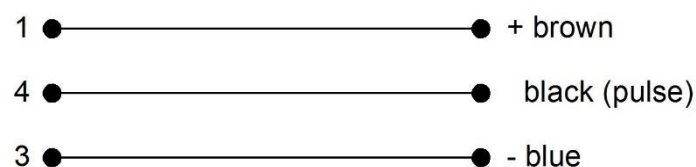



Allmänt: Mätaren är av ovalkugghjulstyp med inbyggda magneter i ett av ovalkugghjulen, samt ett tungelement som sluts två gånger per roterat varv. Mätaren lämpar sig för kontinuerlig mätning av olja, i t.ex. cirkulationssmörjsystem vilket ger upphov till höga uppmätta volymer över tid. (High Volume)


Dimensioner: exkl. kontakt (LxBxH): 55 x 40 x 38
Anslutning: ISO-G 1/8"
Material: Anodiserad aluminium, Art.Nr. 102028
 Syrafast stål SS 2348, Art.Nr. 102030

Vikt: Al: 0,194 kg SS: 0,490 kg
Flödesområde: 0 – 2 500 cm³/min
Temperatur: -20 °C - +70 °C
Vibrationer: 20 G (10 - 20 000 Hz)
Livslängd: 10⁹ pulser motsv. ca 655 m³ (tungelement)

Noggrannhet: Fett NLGI 2: 0,655 cm³/puls ± 3%
 Olja ISO VG 150: 0,610 cm³/puls ± 3%

Eldata:
Kapslingsklass: IP 67
Anslutning: 4-polig std. M12x1 hane.


Stift 1: +
 Stift 3: -
 Stift 4: puls

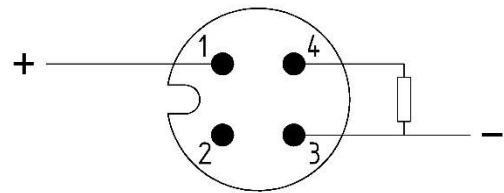

Spänning: 5 – 34 VDC
Ström: Inbyggd begränsning


Tillbehör:
 Art. nr. 907133

Vinklad kontakt M12x1, hona med inbyggd lysdiod.
 5 m. PUR kabel

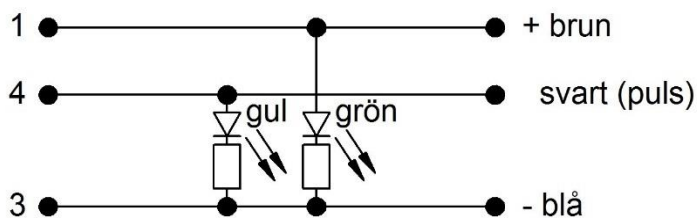


Art. nr. 907134

Vinklad kontakt M12x1, hona.
 5 m. PUR kabel

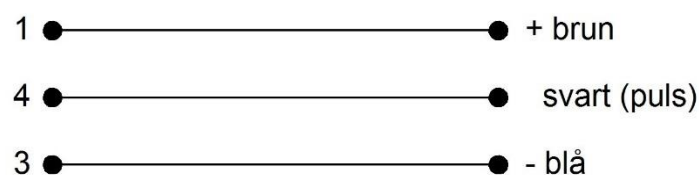

Dimensions
Dimensioner

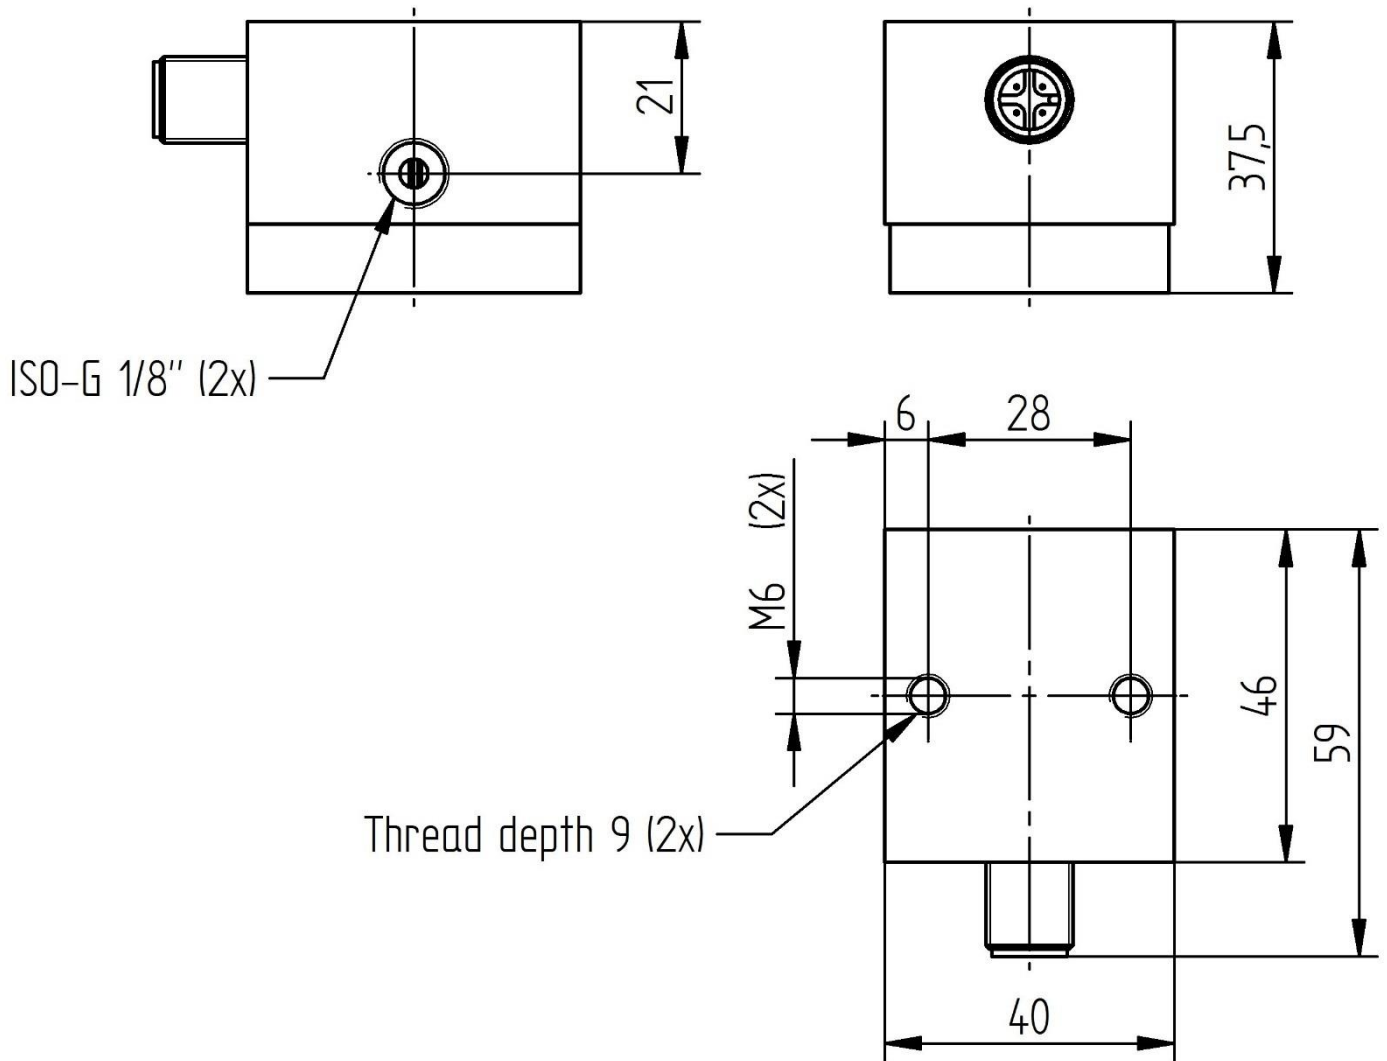

ASSALUB AB P.O Box 240, SE-597 26 Åtvidaberg, Sweden

Tel: +46 120 358 40 Fax: +46 120 152 11
 Email: info@assalub.se Internet: www.assalub.se